



# Installation Example

## Pavement Class A 15 - B 125

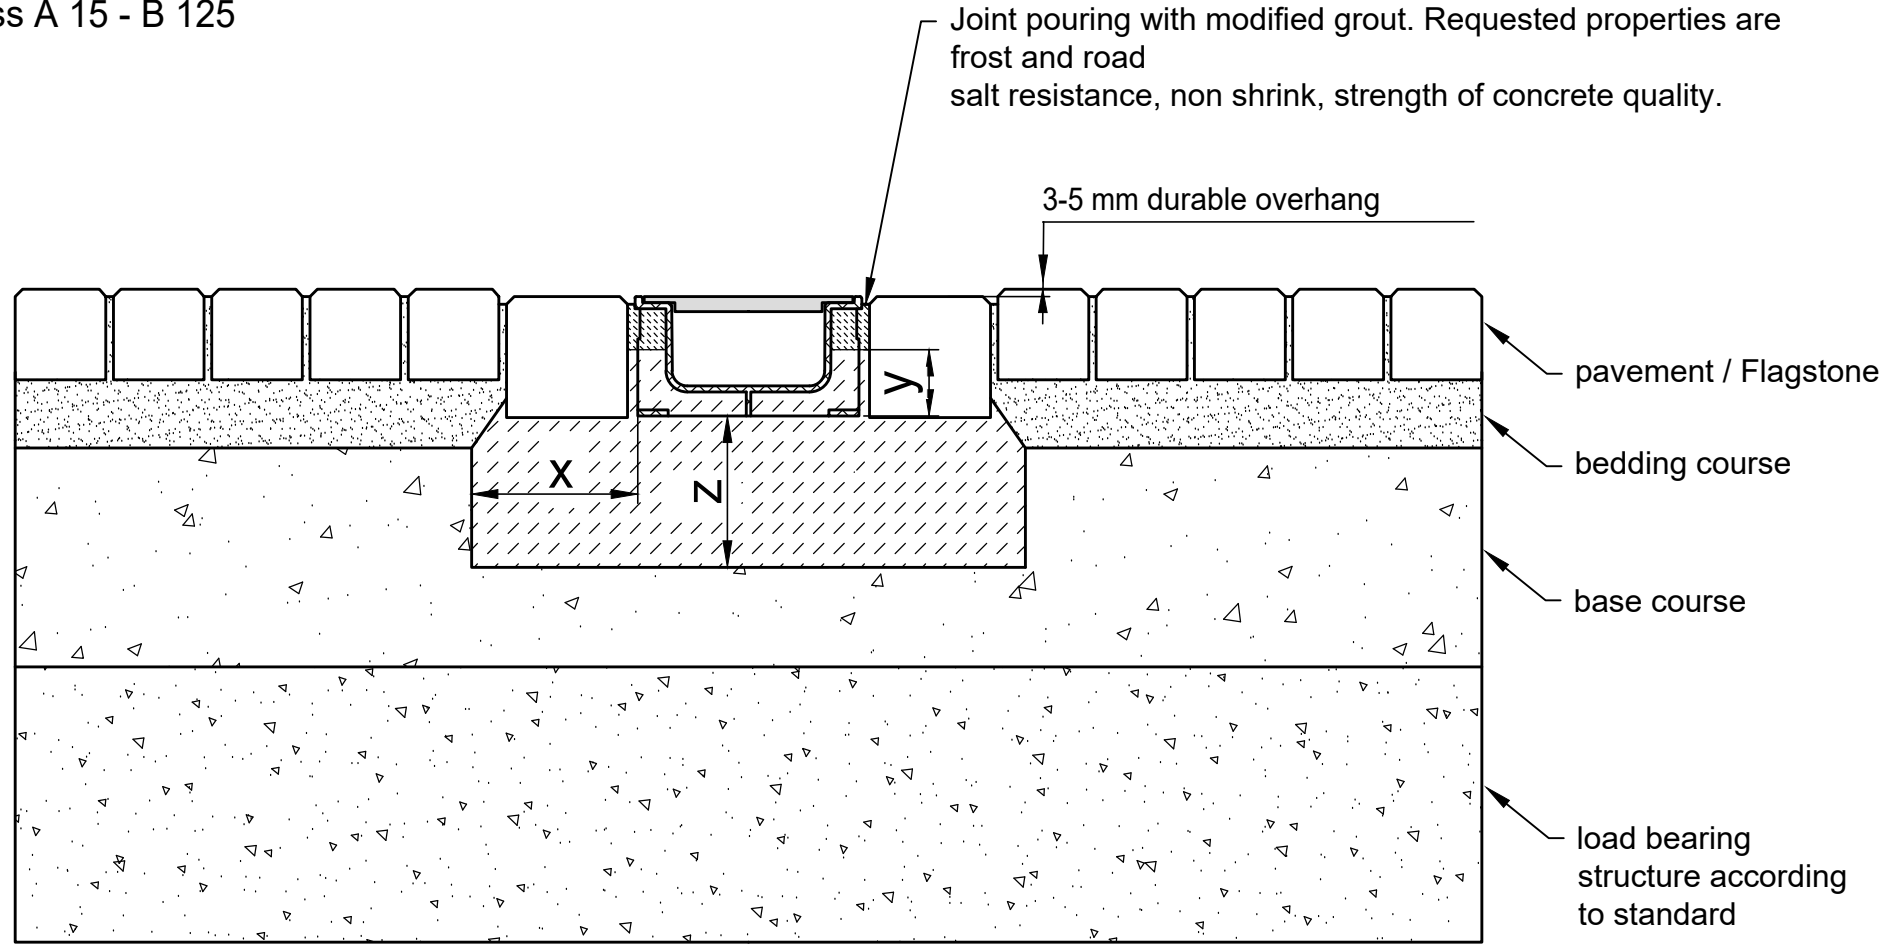

\* y = Channel height plus camber - 4 cm

Category according to EN 1433 / DIN 19580		<b>A 15</b>	<b>B 125</b>	<b>C 250</b>	<b>D 400**</b>	<b>E 600**</b>	<b>F 900**</b>	Applying to following systems: <b>RECYFIX STANDARD 100 Typ 60, Typ 80</b> <b>RECYFIX PLUS 100 Typ 60, Typ 80</b>
Foundation: width x / height y / thickness z (in cm)		10 / * / 10	10 / * / 10					
EN 206-1 / DIN 1045-2	quality of concrete stretcher							
	The named concrete quality is a minimum quality	without danger of frost on the lateral support	C 25/30 X0	C 25/30 X0				
	with danger of frost on the lateral support	C25/30 XF3	C25/30 XF3					
The installation examples / advise constantly are adapted to the technical conditions. With new editions older expenditures lose their validity. Before planning or installation please verify the current version at <a href="http://www.hauraton.com">www.hauraton.com</a> In building construction is a sealing layer below the channels necessary.				Date: 14.03.2025		Our general installation instructions apply.		Format DIN A4
The installation example represents a proven recommendation of the HAURATON company. The final responsibility for the design of e.g. expansion joints or the suitable load transfer is with the responsible planner, the responsibility for the execution is with the contractor.						scale 1:5		 Unit 4, Frenchs Avenue LU6 1BH Dunstable / Bedfordshire United Kingdom Tel. +44 1582 501380 TS-UK@hauraton.com
				0000050991_BRITISH.dwg		7		
				RF Flach StaL 100 Ri Typ 80 Kl. B125		EBBw		